

Figure S1: FESEM image of PS fibers electrospun in humid air. Solvent used in this system was toluene.

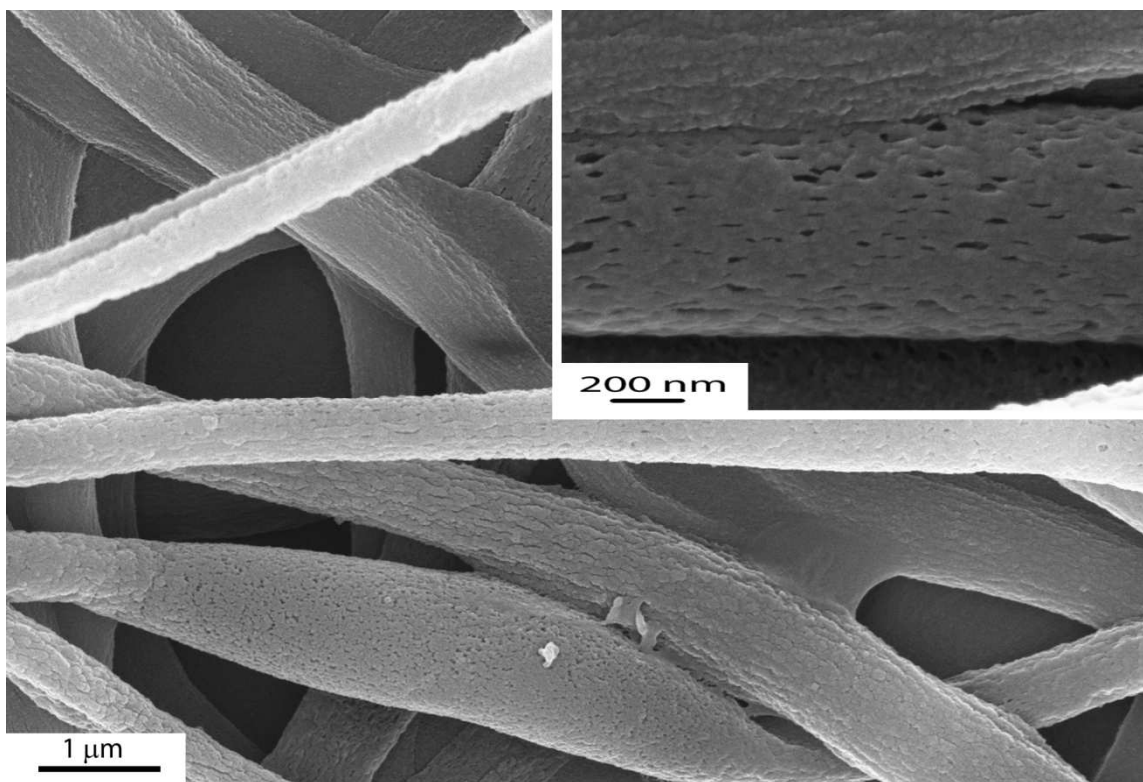


Figure S2: FESEM image of electrospun porous PAN sub-micron size fibers obtained when ethanol was used as a quenching medium

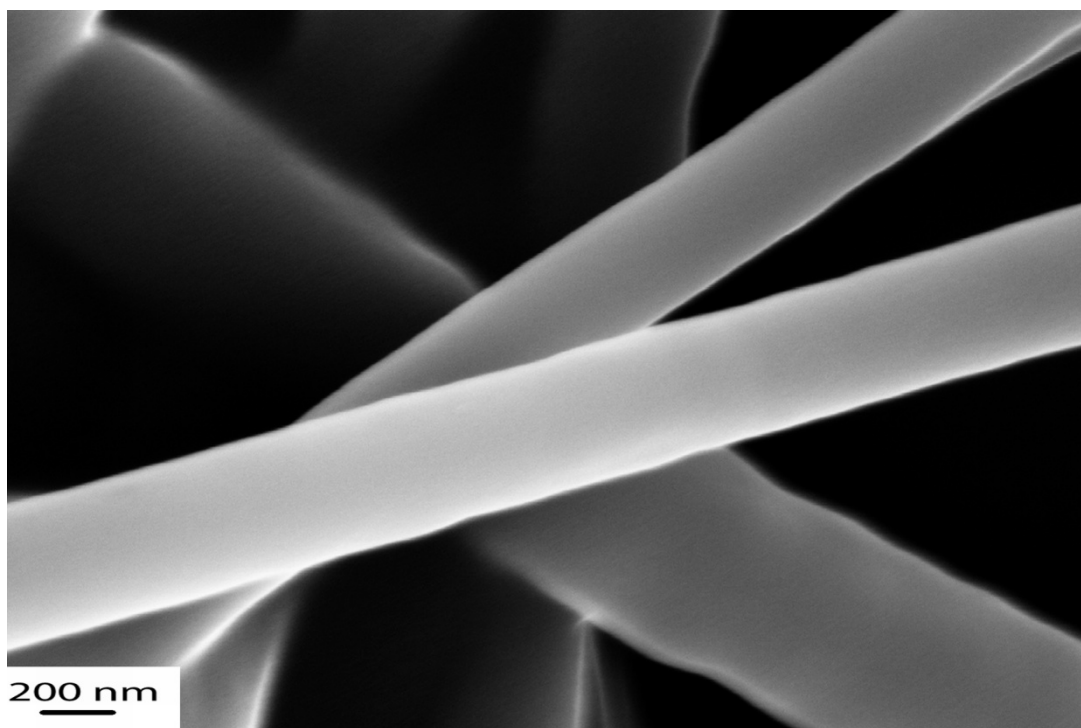


Figure S3: Smooth PAN fibers when hexane is used as the collecting bath.